

bellow gauge with stainless steel internal



model	ø 100mm	ø 160mm
PG 8/A with bottom connection		bottom
PG 8/D with back connection		centric back
standard features		
case with bayonet bezel		stainless steel
bellow system		stainless steel
window		glass
range in mbar or equivalent		-600/0 ... 0/1000
thread bsp - npt - bspt		1/2"
max. process temperature		100°C
accuracy at 20 °C		1,6 %
pointer		adjustable with slotted bush



PG 8

options	ø 100mm	ø 160mm
range 0+25 mbar	a	a
range 0+40 mbar	a	a
safety glass window	a	a
accuracy 1,0% at 20 °C	a	a
non standard thread	a	a

a = available as option

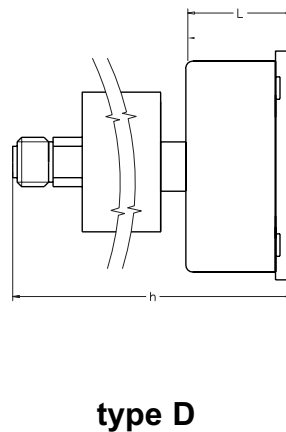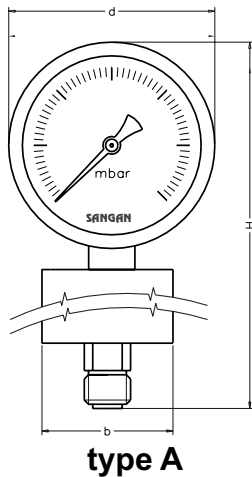

measurements	ø 100mm	ø 160mm
d in mm	118	166
L in mm	49	60
H in mm	210	270
h in mm	110	120
b in mm	65	65
weight in kg	1,2	1,3

dimensions are approximate and can be changed without prior notice